



贴片保险丝(抗浪涌型) C^{RU}US (CAC) VDE JET IS
SMD Fuse (High Inrush Current Withstand) 250V/125V



测试标准:
Testing Standard:
 UL248-1 UL248-14



额定分断能力:
Interrupting Rating:
 50 Amperes at 350V/300V/250V AC(100mA~20A)
 50 Amperes at 125V AC/DC(100mA~20A)

工作温度:
Operating Temperature:
 -55°C ~ +125°C

材料:
Materials:
 End cap: Ag plated brass
 Ceramic tube: ceramic

焊接方法:
Soldering Method:
 Reflow soldering: 260°C, 10s max
 Manual soldering: 380°C, 3s max...

包装:
Packaging:
 Automaton taped 1000PCS per reel,
 30000PCS per carton

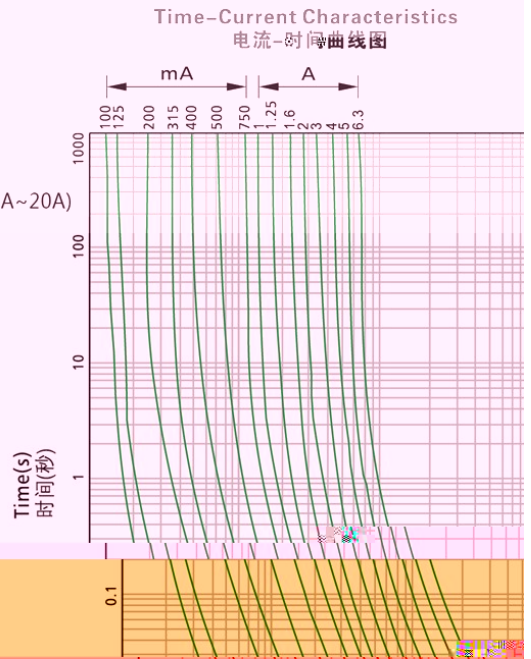

电气特性: Electrical Characteristics

100%
 200%
 300%

4 hours Min(大于4小时)
 1s~60s
 1000V/1000A/100ms

Current(A)

