



## Bridge Rectifiers

### Features

- UL recognition file number E230084
- Universal 3-way terminals: snap-on, wire wrap-around, or PCB mounting
- High surge current capability



# KBPC50005(W) THRU KBPC5010(W)

## Ordering Information (Example)

PREFERRED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
KBPC50005-KBPC5010	A1	Approximate 24.5	50	50	500	Paper Box
KBPC50005W-KBPC5010W	A1	Approximate 22.5	50	50	500	Paper Box

## Characteristics (Typical)

FIG1:Io-Tc Curve

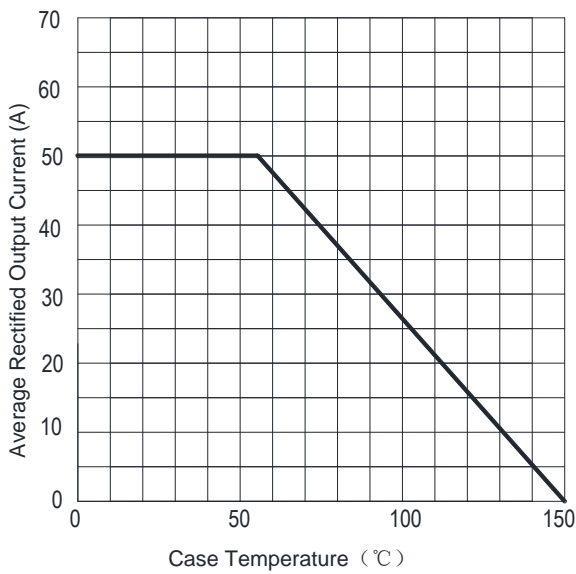


FIG2:Surge Forward Current Capability



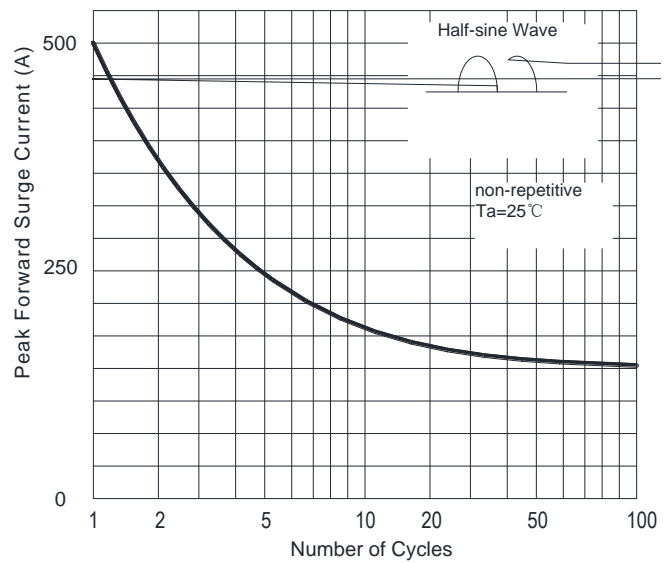



FIG3:Instantaneous Forward Voltage

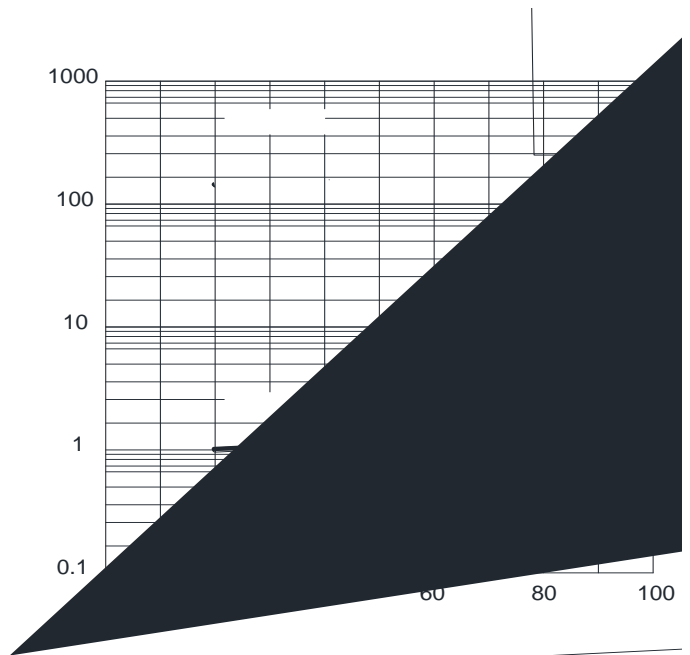

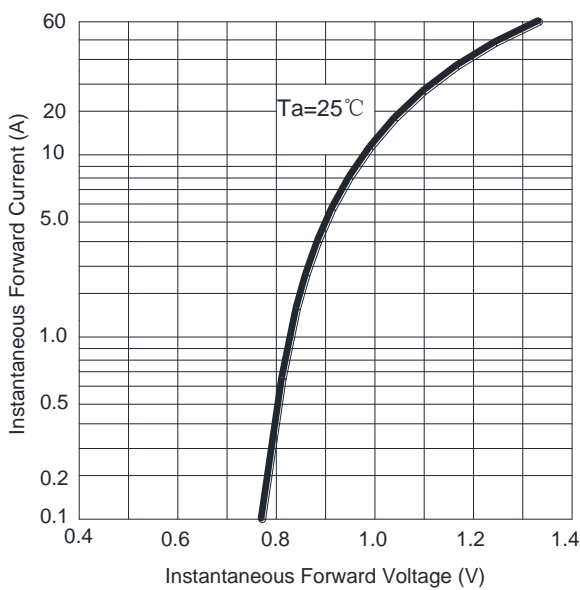

# KBPC50005(W) THRU KBPC5010(W)

## Outline Dimensions

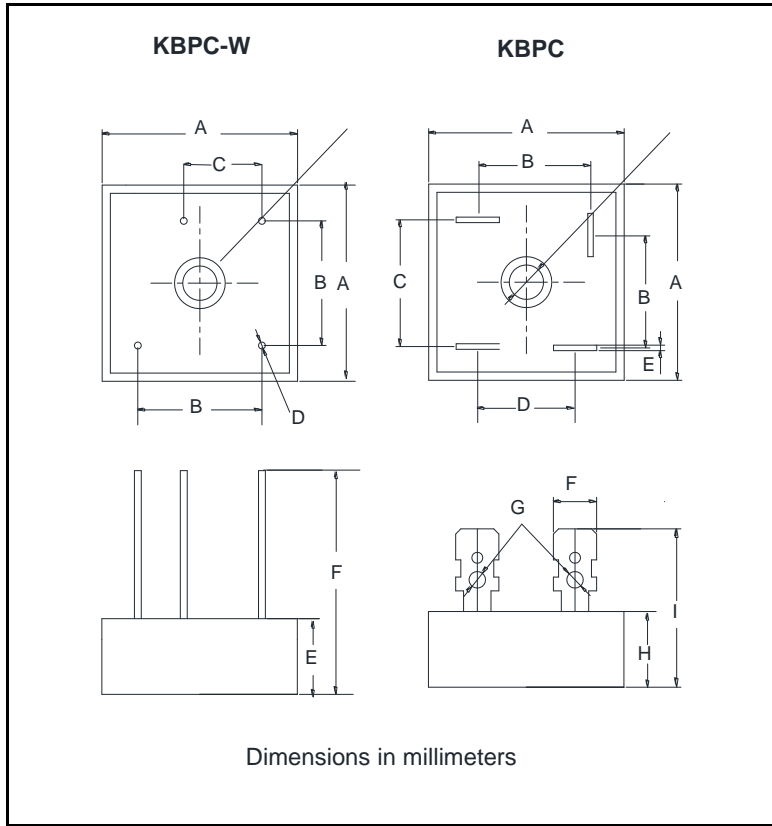

KBPC-W		
Dim	Min	Max
A	28.2	28.8